


SCS PTC-II, PTC-IIe Wiring to IC-706 mic jack

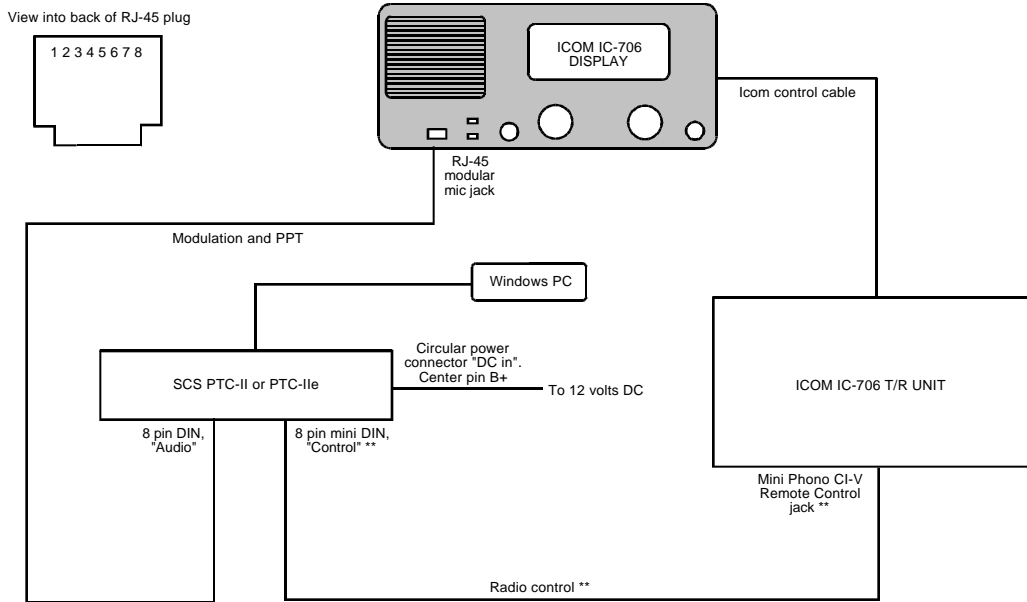

MODULATION AND PTT

PTC-II 8 PIN DIN "AUDIO"	PTC-II COLOR	ICOM RJ-45 PIN NAME	ICOM RJ-45 MIC CONN.	FUNCTION
1	VIOLET	MIC INPUT	6	AUDIO SCS TO RADIO
2	WHITE	GND	7	GROUND
3	YELLOW	PTT	4	PUSH TO TALK
4	GREEN	AF OUTPUT	3	AUDIO RADIO TO SCS

NOTE: INSULATE UNUSED WIRES.

RADIO CONTROL **

PTC-II 8 PIN MINI DIN "CONTROL"	PTC-II COLOR	ICOM PIN NAME	ICOM MINI PHONO	FUNCTION
3	YELLOW	N/A	OUTER JACKET	GROUND
6	BLACK	N/A	CENTER TIP	ICOM

NOTE: NO SHIELD CONNECTION AT RADIO SIDE. INSULATE UNUSED WIRES.

**** NOTE: RADIO CONTROL IS A FEATURE OF THE PTC-II ONLY. DISREGARD RADIO CONTROL ITEMS WHEN USING THE PTC-IIe.**

Farallon Electronics
 2346 B Marinship Way, Sausalito, CA 94965 USA
 415•331•1924 / voice 415•331•2063 / fax
 theoffice@yachtwire.com Copyright Farallon Electronics 1997-2000

Drawn by: rev: 2